Supplements for masthead products
Power supplies

CABRIOLINE

- power supplies for remote DC feeding through RF input with various quantities of outputs
- DC and tone pass (PI011 only)
- protection and indication of DC feeding overload
- die-cast housing inside plastic case




Technical specifications

T Y P E	PI008	PI009	PI011
Ordering number	02548	02549	02559
Frequency range	47-862 MHz		47-2150 MHz
Loss	4 dB (2 RF isolated outputs)	8 dB (4 RF isolated outputs)	2 dB (1 RF output)
DC feeding for external	12 V 0.1 A max.		11.5 V 0.1 A max.
DC pass	-		12 V ÷ 18 V 0.5 A max.
Power consumption	230 V~ 50/60 Hz 4 W		
Dimensions/Weight (packed)	133x63x39 mm/0.36 kg	133x73x39 mm/0.36 kg	133x63x39 mm/0.36 kg

- stabilized power supply with power inserter, F socket - F socket



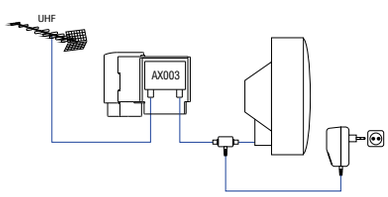

Technical specifications

T Y P E	ZS12/250F
Ordering number	00624
DC output	+12 V 0.25 A
Frequency range	45-862 MHz
Attenuation	1 dB
Output connector	F
Mains voltage	220 V~ 50 Hz
Dimensions	57x81x49 mm